

DH-PFM970-6U

UTP CAT6 Information Module



Features

- UTP CAT6 information module (RJ45 keystone modular jack), can be used for patch panels, wall plates or surface mount boxes;
- Support 100MHz bandwidth and meet the TIA/EIA-568-C requirements;
- Support T568A and T568B wiring with color coded 110 blocks;
- Support 110 or Krone dual type termination;
- 180 degree IDC line way to ensure the shortest distance of cable opening distance;
- PCB made of FR-4 A1.


Technical Specifications

Model	DH-PFM970-6U
Basic information	
Gold plated	50μ inches gold-plating
PCB	FR-4 A1
IDC socket	Phosphor bronze
Wiring mode	Standard information module, T568A/T568B
Wire gauge	22~26 AWG solid wire
Mechanical property	
Voltage rating	DC:1000V (AC:750V),1 minute, no spark-over and flying arc
Insertion life	>1000 Mating Cycles
IDC connection life	>300 Cycles
Housing attribute	
Body material	High impact PC
Color	White
Environment	
Working temperature	-20℃(-4°F)~+70℃(158°F)
Storage temperature	-20℃(-4°F)~+80℃(176°F)
Humidity	0~85%

Order Information

Type	Part Number	Description
Cabling Series	DH-PFM970-6U	UTP CAT6 information module
	PFM970-6U	UTP CAT6 information module
	DH-PFM971-1	Network wall plate(1 port)
	PFM971-1	Network wall plate(1 port)
	DH-PFM971-2	Network wall plate(2 port)
	PFM971-2	Network wall plate(2 port)
	DH-PFM972-6U-1	1m UTP CAT6 patch cord
	PFM972-6U-1	1m UTP CAT6 patch cord
	DH-PFM972-6U-2	2m UTP CAT6 patch cord
	PFM972-6U-2	2m UTP CAT6 patch cord
	DH-PFM972-6U-3	3m UTP CAT6 patch cord
	PFM972-6U-3	3m UTP CAT6 patch cord
	DH-PFM973M-6U-24	24-Port UTP CAT6 rackmount patch panel
	PFM973M-6U-24	24-Port UTP CAT6 rackmount patch panel

Dimensions (mm/inch)

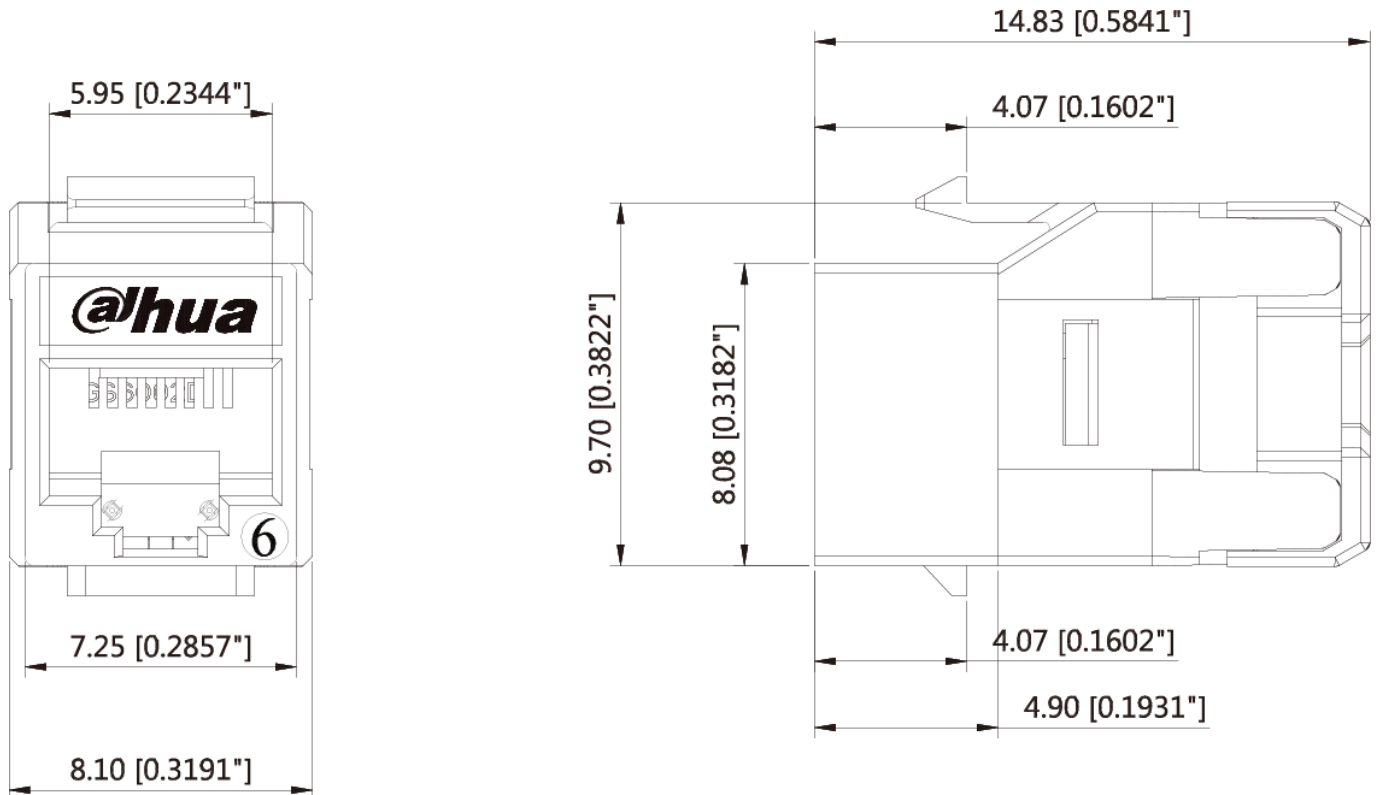

Package Information

- UTP CAT6 Information modules DH-PFM970-6U *30pcs