

Q UVC-G4 Doorbell Pro PoE Kit-White

Switching

WiFi

Camera Security

Door Access

CloudKeys & Gateways

Power Tech

New Integrat


Doorbells > [G4 Doorbell Pro PoE Kit](#)

Datasheet

In The Box

Marketing Images

Installation Guide

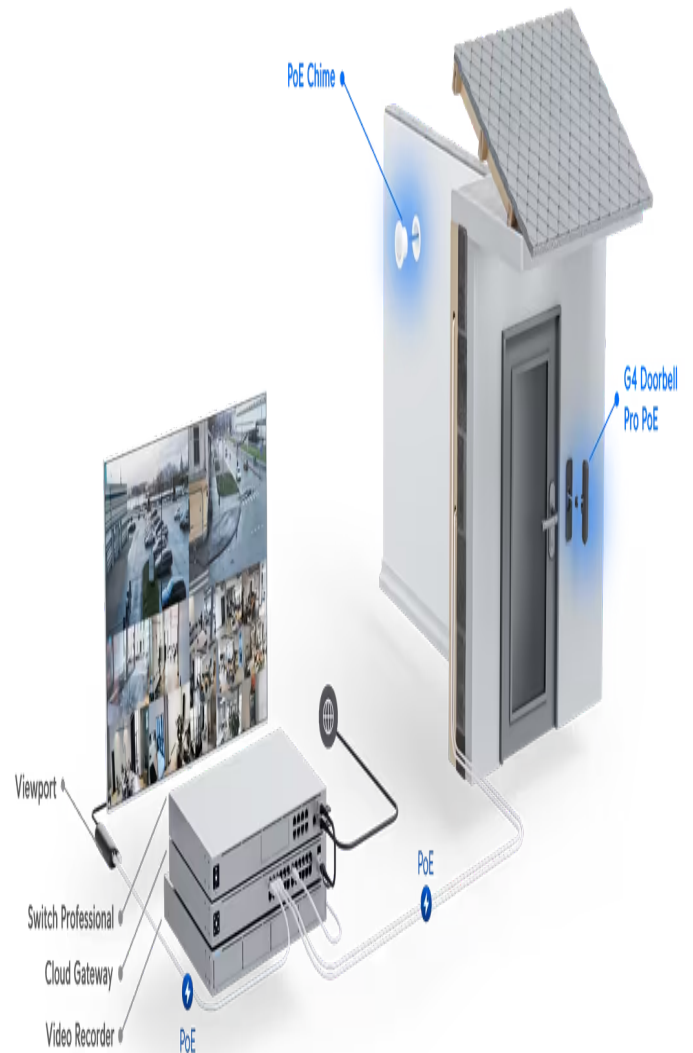

Mechanical

Dimensions	UVC-G4 Doorbell Pro Device: 160.6 x 51.7 x 35.1 mm (6.3 x 2 x 1.4") Wall mount: 159.3 x 50.3 x 17.5 mm (6.3 x 1.9 x 0.7") Wedge: 161.1 x 52.1 x 25.7 mm (6.3 x 2.1 x 1") On-wall mount: 161.1 x 52.1 x 25.75 mm (6.3 x 2.1 x 1")
	UP-Chime PoE Device: Ø62 x 54 mm (Ø2.5 x 2.1") In-wall mount: Ø89 x 63.1 mm (Ø3.5 x 2.5") On-wall mount: Ø62 x 20.2 mm (Ø2.5 x 0.8")
Weight	UVC-G4 Doorbell Pro Device: 264 g (9.3 oz) Wall mount: 56 g (2 oz) Wedge: 33 g (1.2 oz) On-wall mount: 53 g (1.9 oz)
	UP-Chime PoE Device: 158 g (5.6 oz) In-wall mount: 91 g (3.2 oz) On-wall mount: 28 g (1 oz)
Enclosure material	Aluminum alloy, polycarbonate
Mount material	Wall mount: aluminum alloy Wedge: polycarbonate On-wall mount: polycarbonate Chime mout: polycarbonate, zinc alloy
Weatherproofing	IPX4 (UVC-G4 Doorbell Pro)
Color	Black White

Optics	
Sensor	Main camera: 5MP CMOS Package camera: 8MP CMOS
Lens	Fixed focal length
View angle	Main camera: H: 138°, V: 114°, D: 155° (LDC On) Main camera: H: 160°, V: 117°, D: 160° (LDC Off) Package camera: H: 97.5°, V: 79.4°, D: 118.2°
Night mode	Built-in IR LED illumination and IR cut filter

Video

Resolution	Main camera: 2MP 1600 x 1200 (4:3) Package camera: 2MP 1600 x 1200 (4:3)
-------------------	---

Max. frame rate	30 FPS
------------------------	--------

System

Processor	Quad-core Arm® Cortex®-A53 based chip
------------------	---------------------------------------

Networking interface	UVC-G4 Doorbell Pro: GbE RJ45 port UP-Chime PoE: 10/100 MbE port
-----------------------------	---

Power method	PoE
---------------------	-----

Supported voltage range	UVC-G4 Doorbell Pro: 37—57V DC UP-Chime PoE: 44-57V DC
--------------------------------	---

Max. power consumption	UVC-G4 Doorbell Pro: 7W UP-Chime PoE: 3.5W
-------------------------------	---

LED	Link/activity
------------	---------------

Buttons	(1) Ring button (1) Factory reset
----------------	--------------------------------------

Ambient operating temperature	UVC-G4 Doorbell Pro: -30 to 40° C (-22 to 104° F) UP-Chime PoE: 0 to 40° C (32 to 104° F)
--------------------------------------	--

Ambient operating humidity	UVC-G4 Doorbell Pro: 0 to 90% noncondensing UP-Chime PoE: 10 to 90% noncondensing
-----------------------------------	--

Certifications	CE, FCC, IC
-----------------------	-------------

Audio

Microphone	Yes (Can be disabled for the Doorbell)
-------------------	--

Speaker	Yes
----------------	-----

Buzzer	Yes (UP-Chime PoE)
---------------	--------------------

Software

UniFi OS application	UniFi Protect
-----------------------------	---------------

Mobile app	UniFi Protect iOS™ and Android™
-------------------	---------------------------------

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)