

Omada Easy Managed Switch | Datasheet

ES205GP

Omada 5-Port Gigabit Easy Managed Switch with 4-Port PoE+



Highlights

- 5× Gigabit ports (4× 802.3at/af-compliant PoE+ ports)
- 65 W total PoE budget with up to 30 W PoE output per PoE port
- Centralized cloud management via the web or the Omada app
- Easy to use
- VLAN, QoS, and IGMP Snooping
- Fanless design for silent operation
- Durable and compact metal casing and desktop/wall mounting design

Product Pictures




4 × Gigabit RJ45 ports with PoE+ 1 × Gigabit RJ45 port



Omada Solution

Omada's Software Defined Networking (SDN) platform integrates network devices, including access points, switches, and gateways, providing 100% centralized cloud management. Omada creates a highly scalable network—all controlled from a single interface.

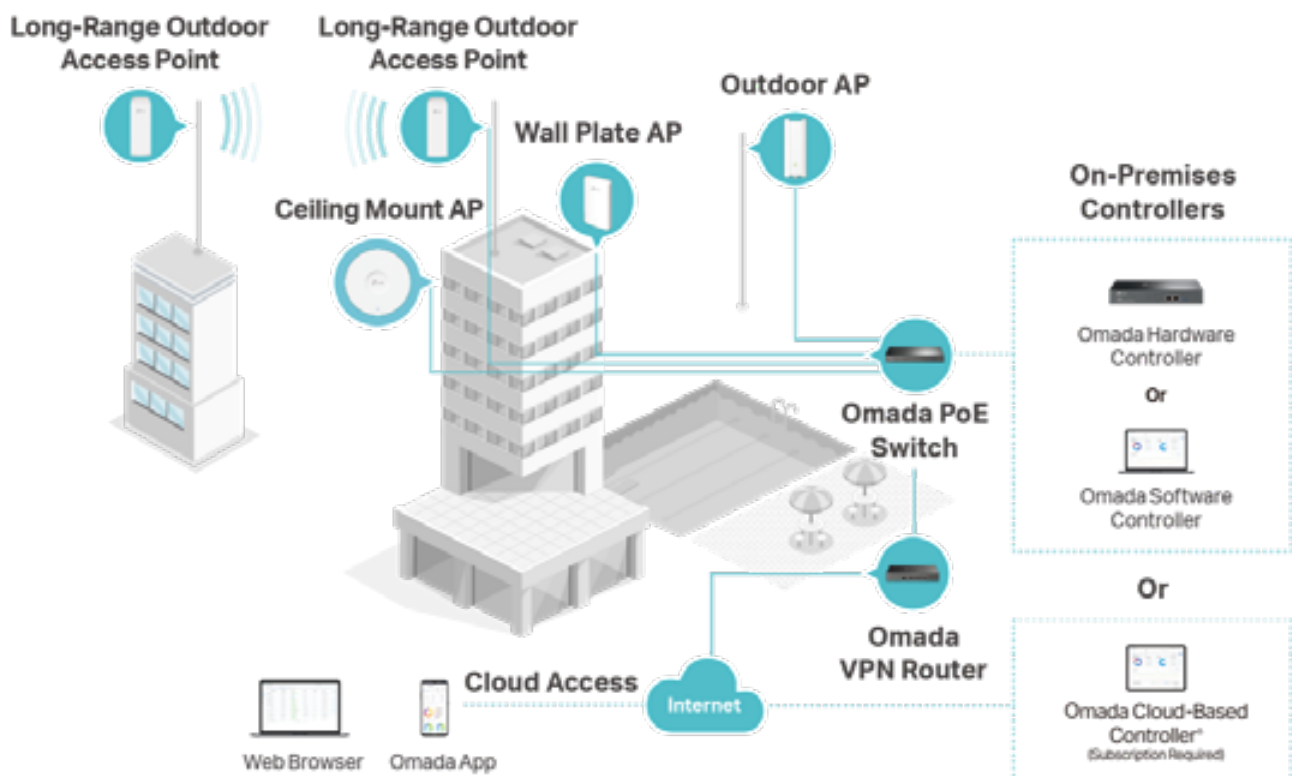

Hassle-Free Cloud or On-Premises Controllers



Multi-Site Cloud Management



Zero-Touch Provisioning (ZTP)*



Intelligent Monitoring

Specifications

Hardware Features & Performance		
Model		ES205GP
General	Interface	5 10/100/1000Mbps RJ45 Ports
	Flash	64 Mbit
	Port Standard	IEEE 802.3i:10BASE-T Ethernet; IEEE 802.3u:100BASE-X Fast Ethernet; IEEE 802.3ab:1000BASE-T Gigabit Ethernet; IEEE 802.3x: Flow Control IEEE 802.1p: Traffic Class Expediting and Dynamic Multicast Filtering IEEE 802.1q: Virtual Bridged Local Area Networks
PoE	PoE Standard	802.3af/at
	PoE Ports	4, up to 30 W /per port
	PoE Power Budget	65 W
Performance	Switching Capacity	10 Gbps
	Packet Forwarding Rate	7.4 Mpps
	MAC Address Table	8K
	Packet Buffer	4 Mbit
	Transmission Method	Store and Forward
	Jumbo Frame	15 KB
Physical & Environment	Power Supply	53.5 VDC / 1.31A
	Dimensions (W x D x H)	3.9 × 3.9 × 1.0 in (99.8 × 98 × 25 mm)
	Fan Quantity	Fanless
	Installation	Desktop/Wall-Mounting
	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
	Operation Humidity	10% to 90% RH, non-condensing
	Storage Humidity	5% to 90% RH, non-condensing
	Certification	CE, FCC, RoHS

Software Features

Model	ES205GP
SDN Support	• Support Hardware Controller, Software Controller, Cloud-Based Controller • Automatic Device Discovery • Batch Configuration • Batch Firmware Upgrading • Unified Configuration
L2 Features	• Link Aggregation - Static Link Aggregation - Up to 2 aggregation groups and up to 4 ports per group • Loopback Detection • Flow Control - 802.3x Flow Control • Mirroring - Port Mirroring - One-to-One - Many-to-One - Ingress/Egress/Both • Port Statistics - Port Mirror Status - Traffic Statistics • 802.1ab LLDP
L2 Multicast	• IGMP Snooping - IGMP v1/v2/v3 Snooping - Fast Leave
VLAN	• MTU VLAN • Port-Based VLAN • 802.1Q Tag VLAN - Max 32 VLAN Groups - 4K VID
QoS	• 802.1p DSCP Priority • 8 Priority Queues • Priority Schedule Mode - WRR (Weighted Round Robin) • Queue Weight Config • Bandwidth Control - Port-Based Rating Limit • Storm Control - Multiple Control Modes (kbps/pps) - Broadcast/Multicast/Unknown-Unicast Control
Management	• Web-based GUI • DHCP Client • Cable Diagnostics

Ordering Information

Host Switch

Model	Description
ES205GP	Omada 5-Port Gigabit Easy Managed Switch with 4-Port PoE+

MC Series Media Converter

Model	Description
MC210CS	Gigabit Single-Mode Media Converter, up to 20 km, chassis mountable
MC200CM	Gigabit multi-mode SC SFP Transceiver, up to 550 m, chassis mountable
MC200L	Gigabit SFP slot supporting mini-GBIC modules, chassis mountable
MC1400	14-slot power supply chassis for TP-LINK MC Series Media Converter, 19-inch rack-mountable

FC Series Media Converter

Model	Description
FC111A-20	100Mbps Single-Mode WDM Media Converter, up to 20 km, TX:1550nm, RX:1310nm, chassis mountable
FC111B-20	100Mbps Single-Mode WDM Media Converter, up to 20 km, TX:1310nm, RX:1550nm, chassis mountable
FC311A-2	Gigabit Single-Mode WDM Media Converter, up to 2 km, TX:1550nm, RX:1310nm, chassis mountable
FC311B-2	Gigabit Single-Mode WDM Media Converter, up to 2 km, TX:1310nm, RX:1550nm, chassis mountable
FC311A-20	Gigabit Single-Mode WDM Media Converter, up to 20 km, TX:1550nm, RX:1310nm, chassis mountable
FC311B-20	Gigabit Single-Mode WDM Media Converter, up to 20 km, TX:1310nm, RX:1550nm, chassis mountable
FC1400	14-slot power supply chassis for TP-LINK FC Series Media Converter, 19-inch rack-mountable

Disclaimers

Cloud management functions require the use of the Omada SDN Controller. Zero-Touch Provisioning requires the use of the Omada Cloud-Based Controller. Go to the Omada Cloud-Based Controller Product List to find all the models supported by the Omada Cloud-Based Controller.

PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: www.tp-link.com.

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2024 TP-Link